


- POWER BACKUP
- EMERGENCY SERVICES
- SOLAR POWER BACKUP
- EV BACKUP (E-RICKSHAW)



INVERTER **BATTERY**




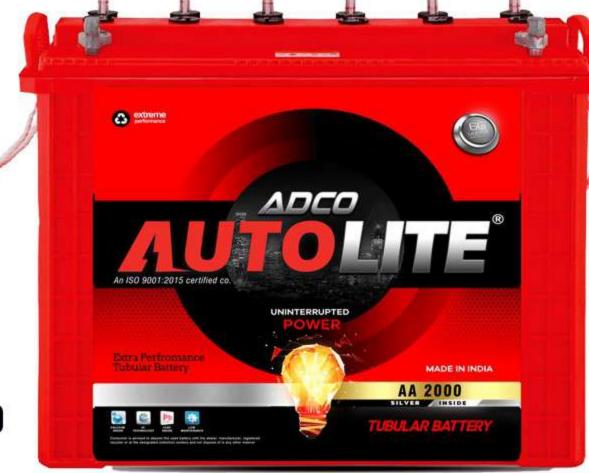






BATTERIES ARE GIVING LIGHT TO THE WORLD

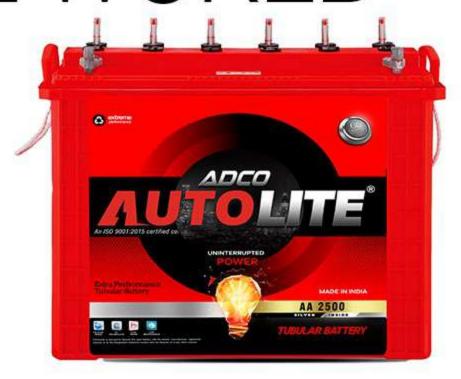

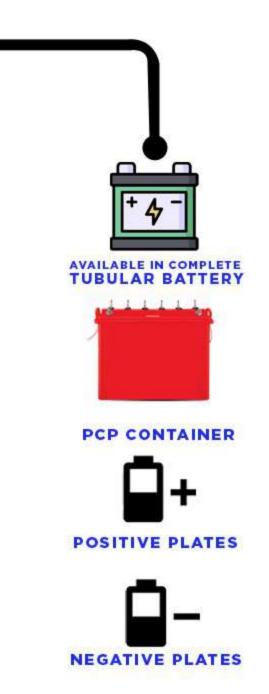

KEY FEATURES

- · Extremely high purity, corrosion-resistant proprietary spine alloy composition ensures longer battery service life
- Tubular plate construction ensures uniform distribution of positive active material for extremely long life and superior performance.
- · Extra-strong and flexible oxidation-resistant gauntlet for higher performance and extremely long life
- · Plates are specially designed for better charge acceptance.

TECHNICAL DATA

TYPE OF BATTERY	NOMINAL VOLTAGE	CAPACITY AT 27°C	FILLED BATTERY WEIGHT =/- 5% (KG)	Overall Dimensions			
				lenght +/- 3mm	Weight +/- 3mm	height upto float top +/- 3mm	Container type
	(V)	(AH)		(MM)	(MM)	(MM)	
AA 1500	12	150	56	500	190	380	PPCP
AA 1800	12	180	58	500	190	380	PPCP
AA 2000	12	200	60	500	190	380	PPCP
AA 2300	12	230	62	500	190	380	PPCP
AA 2500	12	250	66	500	190	380	PPCP



KEY FEATURES

- · Extremely high purity, corrosion-resistant proprietary spine alloy composition ensures longer battery service life
- Tubular plate construction ensures uniform distribution of positive active material for extremely long life and superior performance.
- · Extra-strong and flexible oxidation-resistant gauntlet for higher performance and extremely long life
- · Plates are specially designed for better charge acceptance.

TECHNICAL DATA

TYPE OF BATTERY	NOMINAL VOLTAGE	CAPACITY AT 27°@C10 (AH)	FILLED BATTERY WEIGHT =/- 5% (KG)	Overall Dimensions			
				lenght +/- 3mm	Weight +/- 3mm	height upto float top +/- 3mm	Container type
				(MM)	(MM)	(MM)	
SS 1500	12	150	59	500	190	380	PPCP
SS 2000	12	200	64	500	190	380	PPCP